

Packing list



Dentist Cart

1	Main Unit	*1
2	User Manual	*1
3	Power Cord	*1
4	Water Tank	*1
5	Guide Sleeve Plug	*1
6	Motor Handpiece 1 (with cable)	*1
7	Motor Handpiece 2 (with cable)	*1
8	Three-way syringe (with cable)	*1
9	Foot Pedal (with foot pedal hook)	*1
10	Support Rod	*1
11	Bracket	*1
12	Power Fuse 6.3AH 250V	*2
13	Certificate of Conformity	*1
14	Detachable extension table	*2
15	Ultrasonic Scaler Handpiece and Tips	(optional)
16	Air prophylaxis (with cable)	(optional)



Assistant Cart

1	Main Unit	*1
2	User Manual	*1
3	Power Cord	*1
4	High-performance suction hose	*2
5	Saliva suction hose	*1
6	Power Fuse 6.3AH 250V	*2
7	Certificate of Conformity	*1

jinme

MOBILE DENTAL SOLUTION

Implant & surgery

General practice
(1:5 & 1:1)

Air polisher

Scaler

Three-way syringe

Assistant cart

Dentist cart

Dental chair

 DSPDent


www.dspdent.com
info@dspdent.com

Dentist cart

Multi functions in one device

(Implant, restoration, periodontal, surgery, ect.)

- Electric driven
- Screen touch operation with digital display
- Convenient for mobile treatment
- Large tray design for instrument placement
- Silent ($\leq 60\text{dB}$)

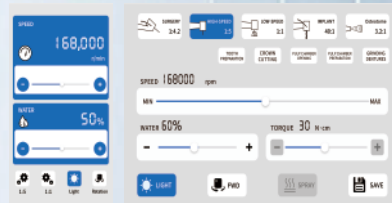

Assistant cart

Strong suction power

Quiet, $\leq 60\text{db}$



10L waste tank

Self-draining without electricity



Clinical pictures



Clinical pictures (End-user experience)



Application Scenario




Laying pipelines Wasting Time, Labor, Money



Plug and play (only electricity)



Much space occupation by different devices

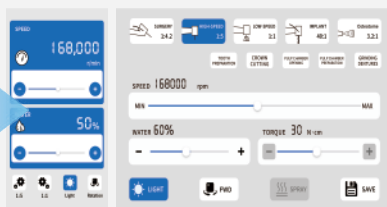


Multiple uses in one machine




Fixed assembly in clinic



Portable/Mobile Treatment

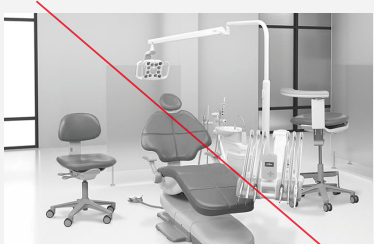

Limited control area

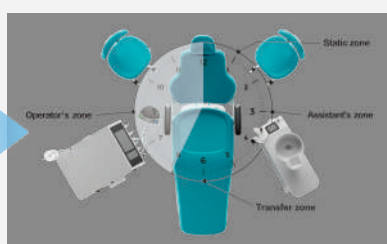

Flexible left or right handed operation

Model	DS70
Size (excluding water tank)	650mm (L) × 550mm (W) × 910mm (H)
Net weight	45 KG
Input voltage	110/220VAC
Rated current	0.1A-4A
Power fuse	2*250V-T6.3AH
Maximum power consumption	400VA
Water tank size	400mm (L) × 140mm (W) × 220mm (H)
Fresh water tank capacity	5L
Cooling water flow at 100%	50 mL/min or more
Recommended water tank coolant	distilled water/purified water
Maximum allowable suspension load	≤1.5KG



Model	Suction 10
Size (excluding water tank)	720mm(L)×270mm(W)×820mm(H)
Net weight	48.5Kg
Input voltage	110/220VAC
Rated current	0.1A-5A
Power fuse	2*250V-T6.3AH
Maximum power consumption	500VA
Sewage tank size	350mm(L)×170mm(W)×280mm(H)
Sewage tank capacity	10L(Automatic overflow protection)
Suction pump	Piston Pump
Ultimate Negative Pressure Value	≥0.06Mpa
Pumping Rate	Strong Suction: 10L/min, Weak Suction: 4.5L/min